


Danfoss



Be independent

*The direct current compressor range from Danfoss
has been extended with the new BD80F*

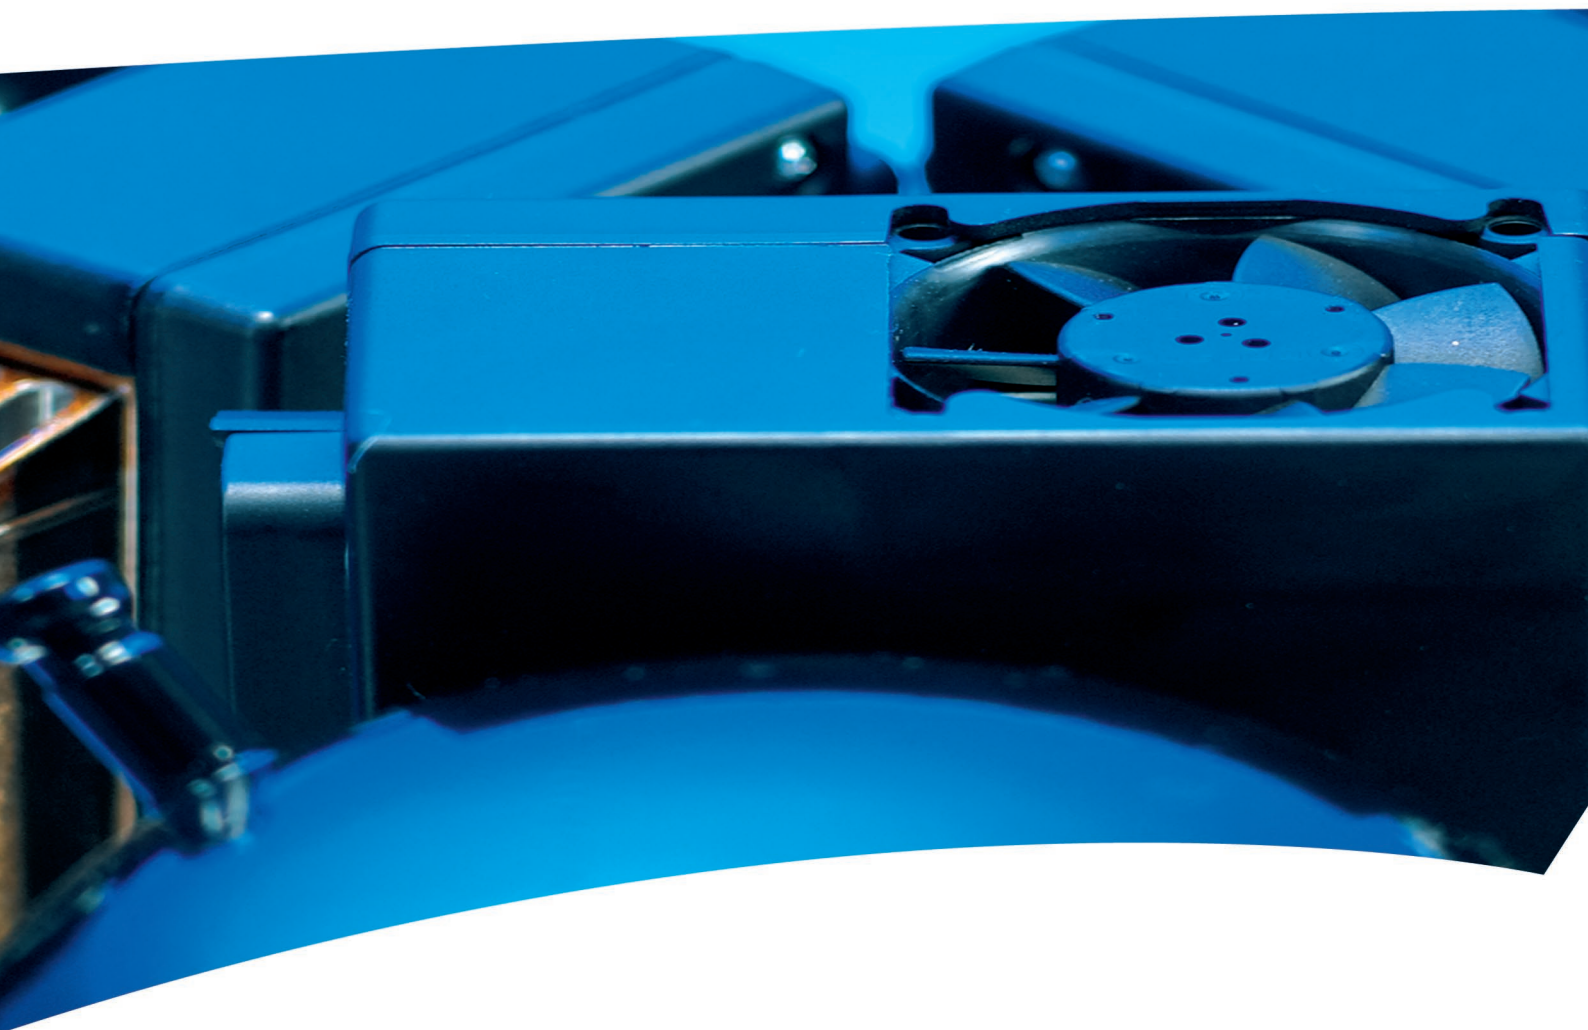


Advantages

Modern comfort is brought into life when leaving home. Danfoss has made it possible. As people go mobile, so does food. The excellent performance of the BD series safeguards food preservation. With our new greatly improved DC compressors for cars, vans, boats, trucks etc., Danfoss have transcended the barriers for mobile refrigeration.

Never before have compressors been more efficient, used less energy and taken up less space. Never have they run more reliably under harsh conditions.

The vital refrigeration chain is maintained in the last link – unaffected by vibrations.

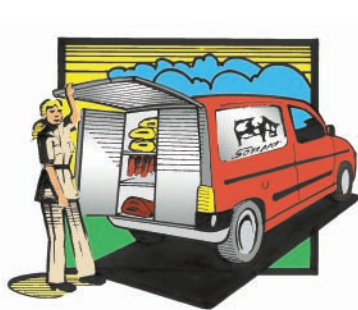

Applications

The BD35F, BD50F and BD80F series 12 V and 24V are direct dual voltage compressors for refrigerant R134a. Versions available for solar power. They can be used for refrigerators and freezers from 10 l up to 500 l. The compressor is controlled by an electronic unit with additional features such as:

- Electronic overload protection
- Fan control
- Over- and under voltage protection
- Protection against wrong polarity
- Compressor monitoring with optional LED
- Capacity control via speed controls.
- Manual or automatic speed selection



Performance data BD35F

Capacity (EN 12900/CECOMAF) Watt

rpm \ °C	-30	-25	-23.3	-20	-15	-10	-5	0	5	10
2,000	15.8	23.9	26.9	33.1	43.8	56.6	71.7	89.9	111	136
2,500	20.2	29.9	33.5	41.2	54.6	70.7	89.7	112	139	
3,000	22.5	32.4	36.5	45.4	61.8	81.7	105	133		
3,500	26.2	35.9	40.4	50.5	69.8	93.6	122			

Power consumption Watt

rpm \ °C	-30	-25	-23.3	-20	-15	-10	-5	0	5	10
2,000	17.6	23.4	25.3	28.7	33.6	38.3	43.0	48.0	53.4	59.5
2,500	23.3	30.9	33.3	37.8	44.1	50.2	56.2	62.3	68.7	
3,000	29.9	36.0	38.3	43.0	50.7	58.7	66.8	74.8		
3,500	36.0	42.8	45.4	50.8	59.5	68.9	78.5			

COP (EN 12900/CECOMAF) W/W

rpm \ °C	-30	-25	-23.3	-20	-15	-10	-5	0	5	10
2,000	0.90	1.02	1.06	1.15	1.31	1.48	1.67	1.87	2.08	2.29
2,500	0.87	0.97	1.01	1.09	1.24	1.41	1.60	1.80	2.02	
3,000	0.75	0.90	0.95	1.06	1.22	1.39	1.58	1.78		
3,500	0.73	0.84	0.89	1.00	1.17	1.36	1.55			

Performance data BD50F

Capacity (EN 12900/CECOMAF) Watt

rpm \ °C	-30	-25	-23.3	-20	-15	-10	-5	0	5	10
2,000	20.1	31.0	34.9	42.8	56.3	72.2	91.6	115	144*	178*
2,500	27.0	39.0	43.4	52.7	68.9	88.9	113	144*	181*	
3,000	31.0	45.4	50.6	61.5	80.7	104	134*	171*		
3,500	38.1	53.2	59.1	71.9	95.0	124*	159*			

Power consumption Watt

rpm \ °C	-30	-25	-23.3	-20	-15	-10	-5	0	5	10
2,000	25.1	31.8	34.0	38.2	44.7	51.3	58.3	65.8	74.2*	83.5*
2,500	34.1	40.5	42.9	47.8	55.8	64.7	74.3	84.8*	96.1*	
3,000	39.9	49.2	52.2	57.8	66.5	76.4	88.4*	104*		
3,500	50.2	59.3	62.5	69.0	80.2	93.4*	109*			

COP (EN 12900/CECOMAF) W/W

rpm \ °C	-30	-25	-23.3	-20	-15	-10	-5	0	5	10
2,000	0.80	0.98	1.03	1.12	1.26	1.41	1.57	1.75	1.94*	2.13*
2,500	0.79	0.96	1.01	1.10	1.24	1.37	1.53	1.70*	1.88*	
3,000	0.78	0.92	0.97	1.06	1.21	1.37	1.51*	1.65*		
3,500	0.76	0.90	0.95	1.04	1.19	1.32*	1.45*			

Performance data BD80F

Capacity (EN 12900/CECOMAF) Watt

rpm \ °C	-30	-25	-23.3	-20	-15	-10	-5
2,500	35.3	49.5	55.0	66.6	87.1	112	140
3,100	41.8	59.0	65.6	79.6	104	133	168
3,800	49.6	70.5	78.5	95.3	125	159	200
4,400	54.8	78.0	86.7	105	138	176	221

Power consumption Watt

rpm \ °C	-30	-25	-23.3	-20	-15	-10	-5
2,500	40.0	50.0	53.4	60.3	71.3	83.1	96
3,100	48.7	61.2	65.4	73.8	87.0	101	118
3,800	59.5	75.0	80.2	90.3	106	124	145
4,400	69.0	87.0	93.0	105	123	144	168

COP (EN 12900/CECOMAF) W/W

rpm \ °C	-30	-25	-23.3	-20	-15	-10	-5
2,500	0.88	0.99	1.03	1.10	1.22	1.34	1.46
3,100	0.86	0.96	1.00	1.08	1.20	1.31	1.42
3,800	0.83	0.94	0.98	1.06	1.17	1.28	1.39
4,400	0.79	0.90	0.93	1.01	1.12	1.22	1.32

More than 25 years of close cooperation with our customers and their customers have taught us their requirements and applications within refrigeration and air conditioning.

Our technological leadership is superior and further strengthened by more than 25 years of experience with DC compressors. Danfoss is a global player with manufacturing, sales and service in more than 120 countries world wide.

Danfoss Compressors GmbH

Mads-Clausen-Strasse 7
Postfach 1443, D-24939 Flensburg
Telefon: (0461) 4941-0
International: +49 461 4941-0
Telefax: +49 461 44715
Telex: 227 43 dancom d